
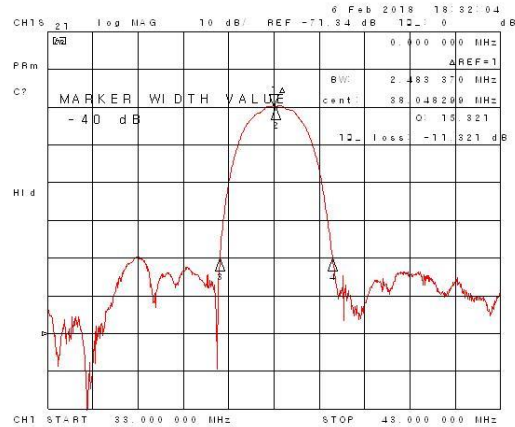


## PRODUCT SPECIFICATION FOR INFORMATION

- Customer : VSSC
- Product Name : SAW BAND PASS FILTER
- Part No : M038010S


### 1. Typical Performance

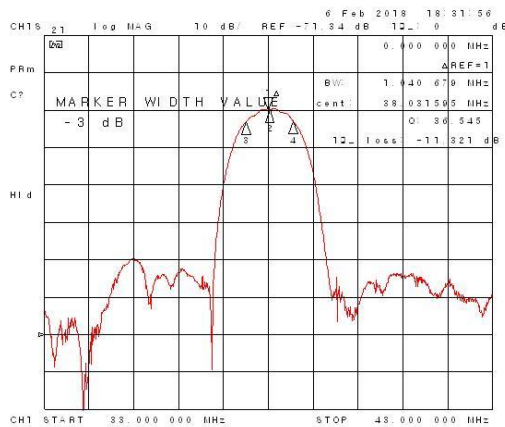


### 2. Specification

Frequency Characteristics		Minimum	Typical	Maximum
Center Frequency	MHz	-	38.00	-
Insertion Loss	dB	-	11.00	13.00
1dB Bandwidth	MHz	0.50	0.60	-
3dB Bandwidth	MHz	0.95	1.05	-
40dB Bandwidth	MHz	-	2.50	3.00
Attenuation	dB	40	45	-
Amplitude Ripple	dB	-	0.60	1.20
Group Delay Variation	nsec	-	70	150
Absolute Delay	µsec	-	1.7	-
Temperature Coefficient of Frequency	ppm/°C	-	-20	-
Operating Temperature Range	°C	-40 ~ +70		
Package	mm	13.3X6.5 (SMD)		

### Package Dimension

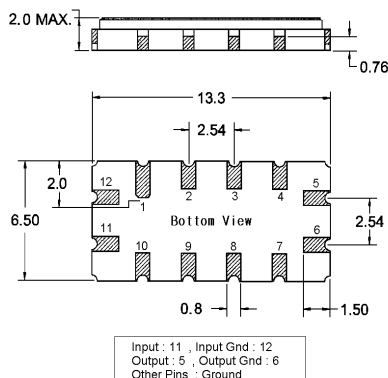

### Matching Configuration

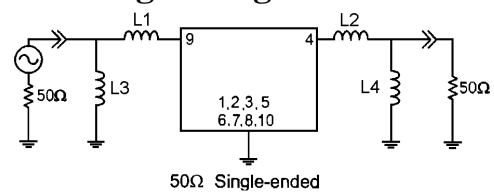

$L1 = 270\text{nH}$ ,  $L2 = 270\text{nH}$ ,  $L3 = 180\text{nH}$ ,  $L4 = 180\text{nH}$

Source / Load Impedance = 50Ω

Ambient Temperature = 25°C

