

## PRODUCT SPECIFICATION FOR INFORMATION

PRELIMINARY SPECIFICATION


**Product Name: Monoblock Band Pass Filter**

**Part No: MBP-C5750\_500MM-A-R1**

### ■ History List

No.	Rev. No.	Description	Date	Author	Final Approver
1	R0	Draft	2022.02.10	Bryan Jeon	Michael Jeon
2	R1	Added the simulation curve	2022.02.16	Bryan Jeon	Michael Jeon

## ■ Mechanical Drawing

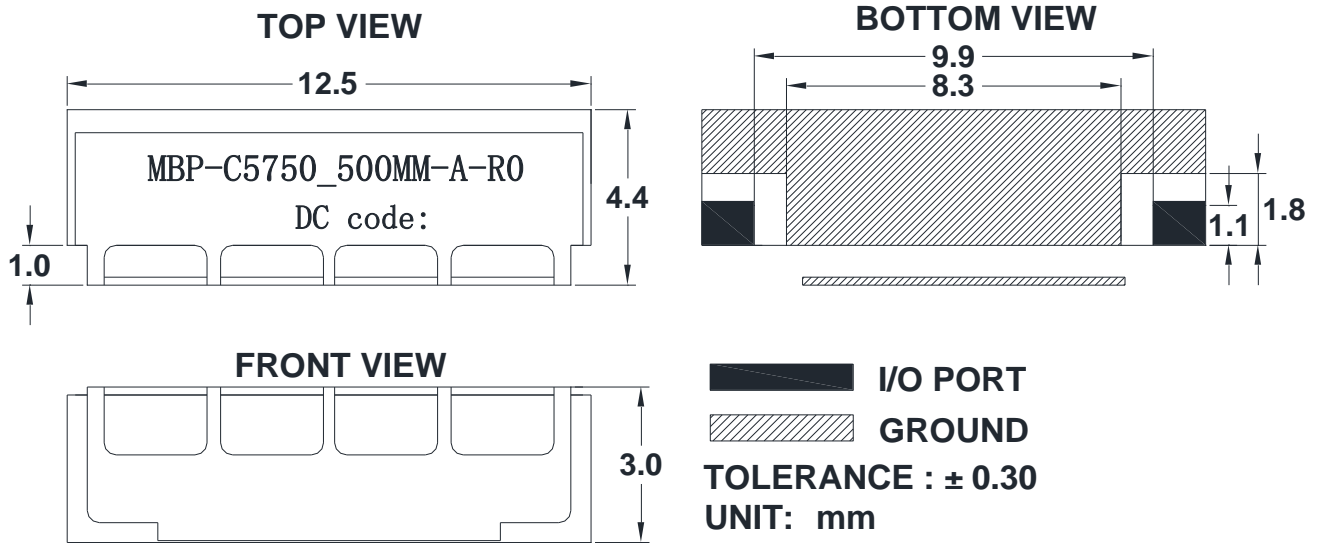


Note  
 1. Connector: SMD  
 2. Finish: Silver plated

## ■ Electrical Specification


Parameter	Specification	Remark
1. Center Frequency	5750MHz	
2. Bandwidth [BW]	$F_c \pm 250\text{MHz}$ [5500~6000MHz]	
3. Insertion Loss in BW	2.0dB Max.	
4. Ripple in BW	0.5dB Max.	
5. Return Loss in BW	15dB Min.	
6. In/Out Impedance	50Ω	
7. Attenuation [Absolute Value]	60dB Min. @ 750~1250MHz	
	60dB Min. @ 2875~3000MHz	
	60dB Min. @ 6875MHz	
	50dB Min. @ 7750~8000MHz	
8. Power Handling	1W Max.	
9. Operation Temperature Range	-40°C to +85°C	
10. Measurement JIG	The top should be grounded.	

Remarks: This is a preliminary datasheet for reference.

## Simulation Curve

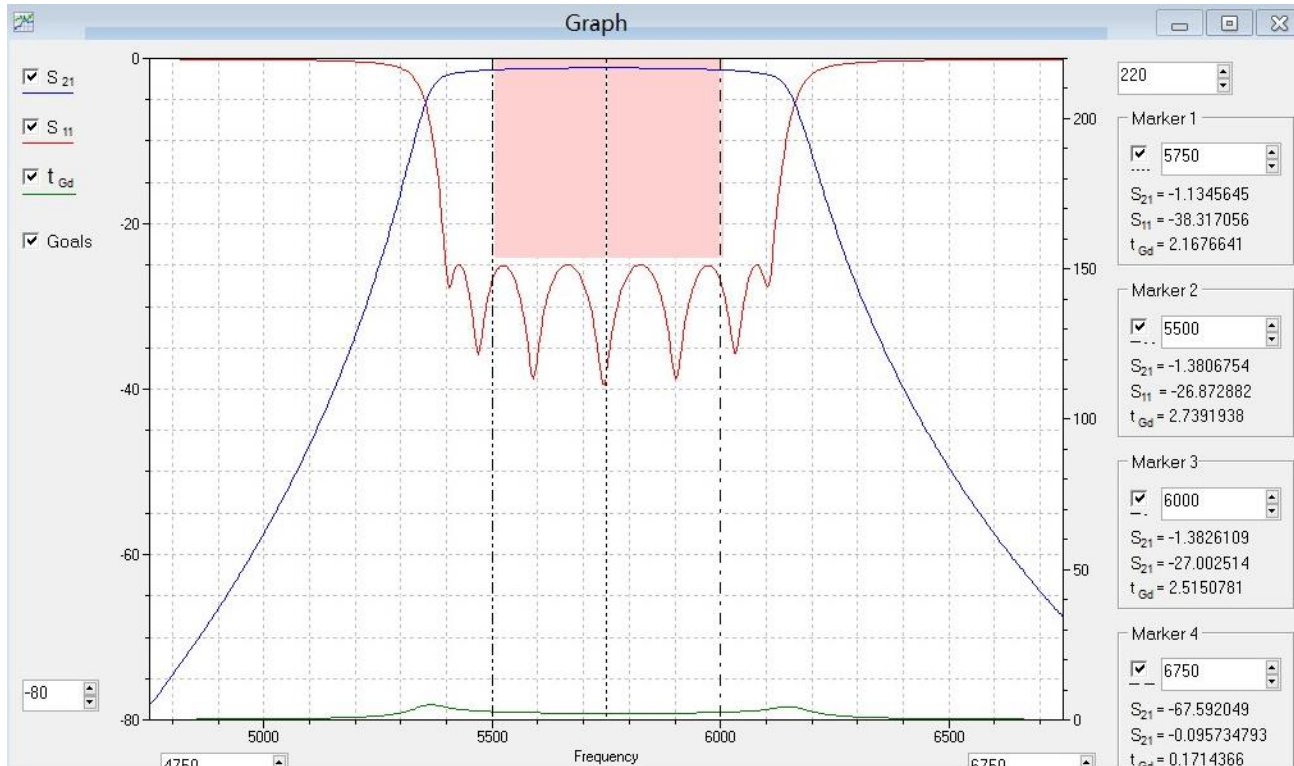

## Recommended PC Board Pattern

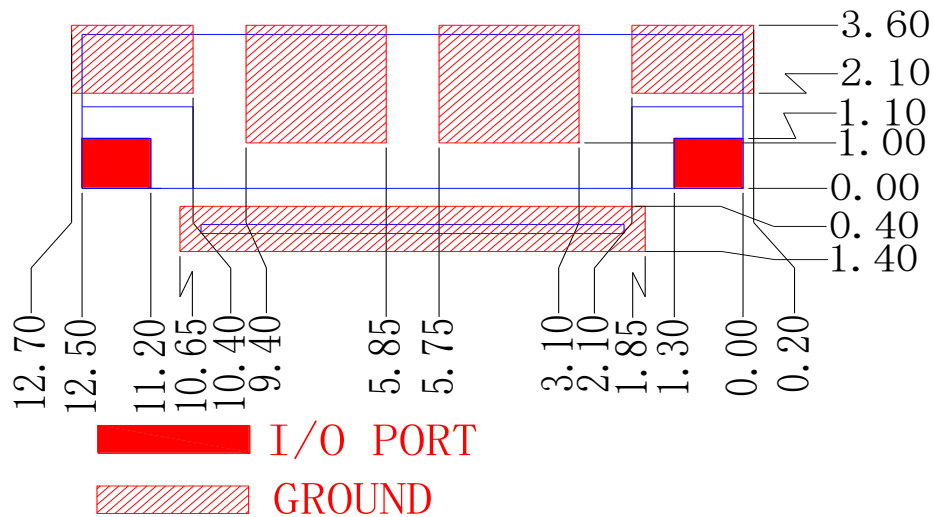

Remark: Recommend using silver-containing solder paste